

## MODEL VARIATION



5SDK5

5SDK8

5SDK10

## MAIN SPECIFICATIONS

Model		5SDK5	5SDK8	5SDK9	5SDK10	5SDK11	
Engine Model		3TNV88	1DZ- [ 1DZ- ]	2Z[ 3Z ]	2Z[ 3Z ]	2Z[ 3Z ]	
Operating Load (SAE)	kg	430	650	730	820	900	
Bucket Capacity	m <sup>3</sup>	0.22	0.32	0.32	0.34	0.34	
Overall Width w/Bucket	A mm	1230	1530	1530	1530	1530	
Clearance Circle w/Bucket	B mm	1700	1890	1930	1960	1960	
Overall Height	C mm	1860	1945	1945	1950	1950	
Overall Length w/Bucket	D mm	2875	3095	3200	3235	3235	
Machine Weight w/Full Fuel Tank and Bucket		kg	1865	2510[ 2660 ]	2660	2885	2940



NOTE : ( ) for optional engine

## ENGINE SPECIFICATIONS

Model	Diesel	YANMAR 3TNV88	TOYOTA 1DZ-	TOYOTA 1DZ-
Piston Displacement	cc	1642	2486	2486
Rated Horsepower (Net) /r.p.m.	kW	22/2400	39/2400	38/2400
Rated Torque/r.p.m.	N-m	106/1000	160/1600	157/2200

Model	Diesel	TOYOTA 2Z	TOYOTA 3Z
Piston Displacement	cc	3469	3469
Rated Horsepower (Net) /r.p.m.	kW	44/2300	42/2200
Rated Torque/r.p.m.	N-m	200/1600	200/1600

2Z: Non-road Mobile Machinery (97/68/EC; Stage )  
 1DZ- : Non-road Mobile Machinery (97/68/EC; Stage )  
 EPA Non-road Diesel Emissions (40 CFR Part89; Interim Tier 2)  
 1DZ- , 3Z, 3TNV88: Non-road Mobile Machinery (97/68/EC; Stage A)  
 EPA Non-road Diesel Emissions (40 CFR Part1039; Interim Tier 4)

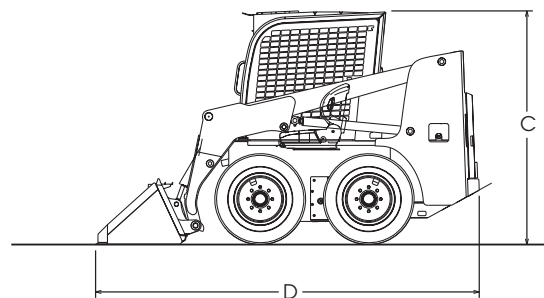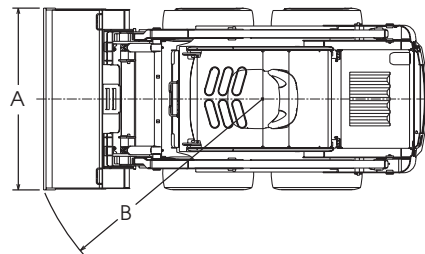

The data in this brochure was determined based on our standard testing condition. Operating performance may vary depending on the actual specifications and condition of the vehicle, as well as the conditions of the operating area. Due to photography and printing, color of actual vehicle may vary from this brochure. Some photos have been computer-enhanced. Availability and specifications are determined regionally and are subject to change without notice. Please consult your Toyota representative for details.

All rights reserved by Toyota Industries Corporation.